

TRIPLE R OIL CLEANER: SE SERIES OFFLINE OIL CLEANERS



OFFLINE OIL CLEANER



TRIS | Triple R Industrial Services Triple R Oil Cleaner

www.tris.pro

www.tris.pro





Effectively remove particles, water and varnish!

The SE series manufactured by Triple R Oil Cleaner I TRIS have been designed to purify and keep oil perfectly clean for applications with a system volume of approx. 6000 litres. The system ensures effective removal of all dirt particles, condensation and oxidation products (varnish) that cannot be removed with conventional filters.

How it works

The SE system is connected as a bypass and has its own motor-pump combination, making the SE series system suitable for pressureless applications. The SE pumps the oil through the filter housing, then back to the tank via a pressureless return.

Benefits

- Prevents defects in hydraulic systems
- Improves the reliability & productivity of your machines
- Extends the life of all hydraulic components, such as pumps, servo valves and seals
- Extends the life of the oil
- Extends the service life of standard filters
- Reduces maintenance costs
- Reduces oil consumption
- Reduces machine downtime

Technology

The oil is forced axially through the filter element by the motor-pump combination, with pressureless return.

The SE system is available in a range of models, including mobile configurations.



1st stage


big particles are retained on the top of the filter

2nd stage

small particles are trapped in the mid stage of the filter element

3rd stage

the smallest particles are trapped in the lower and compressed part of the filter.

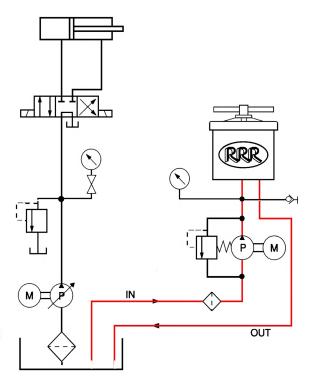


www.fris.pro









TRIPLE R OIL CLEANER: SE SERIES EXAMPLES

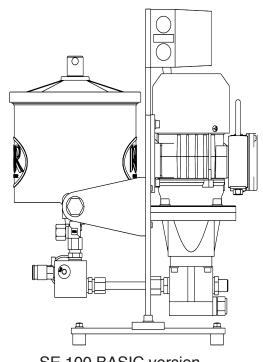




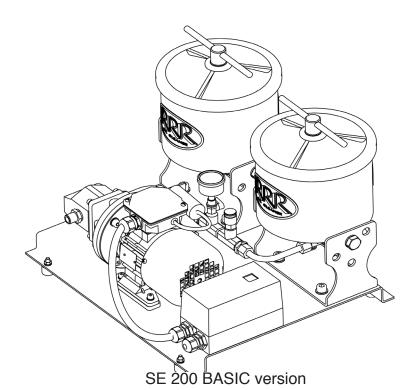

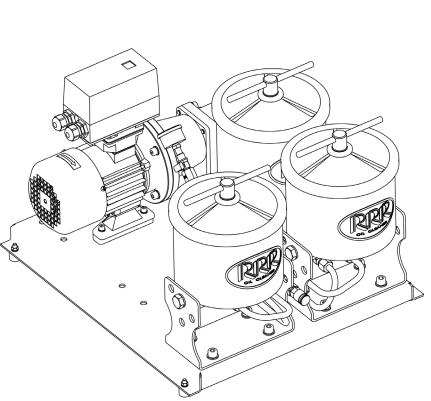



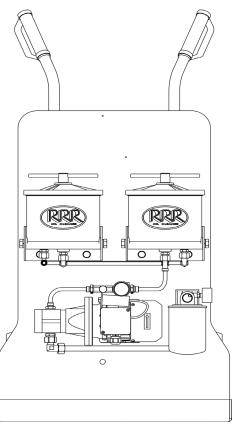

SE 200 MOBILE version

www.fris.pro





TRIPLE R OIL CLEANER: SE SERIES SELECTION CHART FOR HYDRAULIC AND LUBRICATION OILS

		APPROX. HYDAULIC OIL VOLUME BASED ON MAX 180cSt						
	MODEL	< 500L	< 750L	< 1500L	< 2250L	< 3000L	< 4500L	> 4500L
lon	SE-50							
SYSTEM FOR YOUR APPLICATION	SE-100							
UR AP	SE-200							
FOR YC	SE-300							
STEM I	SE-400							
~	SE-600							
TRIPLE	OSCA series							

		APPROX. LUBRICATION OIL VOLUME BASED ON MAX 460cSt						
	MODEL	< 250L	< 375L	< 750L	< 1125L	< 1500L	< 2250L	> 2250L
NOIL	SE-50							
PLICAT	SE-100							
UR AP	SE-200							
FOR YOUR APPLICATION	SE-300							
SYSTEM	SE-400							
\simeq	SE-600							
TRIPLE	OSCA series							





TRIPLE R OIL CLEANER: SE SERIES SPECIFICATIONS AND FILTERELEMENT SELECTION CHART

TRIPLE R SE S	TRIPLE R SE SERIES SYSTEM SPECIFICATIONS						
MODEL	Hydraulic oil version pump capacity	Lubrication oil version pump capacity	Dimensions (mm)	Material			
SE-50	~1.6L/min	N.A.	~ 363 x 230 x 460	Aluminium			
SE-100	~ 2.5L/min	~1.2L/min	~ 385 x 230 x 460	Aluminium			
SE-200	~5L/min	~2.5L/min	~ 470 x 400 x 370	Aluminium			
SE-300	~7.5L/min	~3.3L/min	~ 610 x 470 x 370	Aluminium			
SE-400	~9L/min	~5L/min	~ 610 x 470 x 370	Aluminium			
SE-600	~16L/min	~7.5L/min	~ 1080 x 470 x 370	Aluminium			

TRIPLE R ELEMENT SELECTION CHART						
MODEL	SE-50	SE-100	SE-200	SE-300	SE-400	SE-600
# of elements	1	1	2	3	4	6

	TRIPL	E R ELEMENT SE	LECTION CHART				
MODEL	D-100	E-100	E-100 SP	M-100	X-100	WE-100	WG-100
ARTICLE #	TR-20000	TR-20470	TR-20472	TR-20430	TR-25450	TR-20450	TR-25470
MICRON*	2	5	2	2	10	X	10
BETA	75	539	539	200	145	х	93
FLUID	hydraulic oil	hydraulic, engine oil, fuel	compressor fluids	hydraulic oil, fuels	lubrication oil	hydraulic, lubrication, engine oil	glycols
REMARKS	high dirt capacity					high water capacity	
IMAGE	RARR CONTRACTOR OF THE STATE OF	RRP STATE OF THE S	RRAP STATE OF THE	HARR PRI	SER SHEET REAL SHEET SHE		

^{*}All ratings are absolute ratings, multipass tested.







TRIPLE R OIL CLEANER: SE SERIES ORDER CODE GENERATOR, HOW TO ORDER

MODEL	HOUSING	VERSION	FLUID	GASKET	VOLTAGE	ON/OFF	SAMPLE
SE	TABLE 1	TABLE 2	TABLE 3	TABLE 4	TABLE 5	TABLE 6	TABLE 7

TABLE 1	CODE
Single house	50
Single house	100
Two housings	200
Three housings	300
Four housings	400
Six housings	600

TABLE 2	CODE
Basic (50-600)	В
Mobile (100, 200 & 400 only)	M
Wall mount (100, 200 & 300 only)	w

TABLE 3	CODE
Hydraulic	Н
Lubrication	L
Fuels	F
Glycol	WG

TABLE 4	CODE
NBR GASKET (standard)	leave empty
VITON GASKET (pump and housing gaskets)	V

TABLE 5	CODE
110V single phase	110V
230V single phase	230V
400V three phase	400V

TABLE 6	CODE
Motor protection / On-Off (standard)	0
Without switch	leave empty

TABLE 7	CODE		
Sample port (standard)	s		
Without sample port	leave empty		

COMPLETE EXAMPLE ORDER CODE*							
SE	100	В	Н	V	230V	0	S

^{*} more options and custom engineered systems are available, contact us for more information









SE SERIES OFFLINE OIL CLEANERS ARE PERFECT FOR:

Gas turbines
Steam turbines
Gearboxes
Mobile Hydraulics
Generators
Injection Moulding Machines
General Hydraulics
Fueltanks
Glycol fluids
Compressor fluids
& much more!

check out www.tris.pro for more information or contact us: +31(0)742428109 info@tris.pro



